

1-46. AUD


i-AUD, Web Font

i-AUD Web Font

Web Font

1. AUD 7
AUD 7 {ContextRoot}/extention/AUD/webfont/

eg.

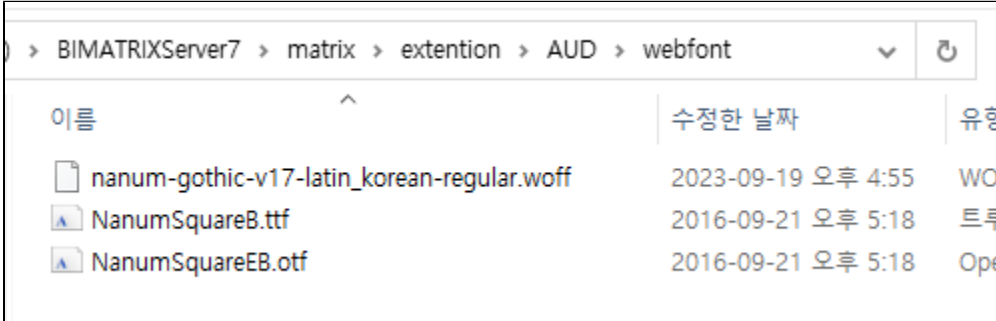

2. i-AUD

: AUD 7 {ContextRoot}/extention/AUD/customscript.jsp

CustomInitialize

	AUD.GlobalConfig.WebFont.Add	
1	Caption	Caption
2	Code	css
3		

font-family

, font-family , , . (" -"), (" _").

Valid family names

The following declarations are valid:

CSS



```
font-family: "Goudy Bookletter 1911", sans-serif;
```



The following declarations are invalid:

CSS



```
font-family: Goudy Bookletter 1911, sans-serif;  
font-family: Red/Black, sans-serif;  
font-family: "Lucida" Grande, sans-serif;  
font-family: Ahem!, sans-serif;  
font-family: test@foo, sans-serif;  
font-family: #POUND, sans-serif;  
font-family: Hawaii 5-0, sans-serif;
```



The following example is technically valid but is not recommended:

CSS



```
font-family:  
  Gill Sans Extrabold,  
  sans-serif;
```

1: <https://developer.mozilla.org/en-US/docs/Web/CSS/font-family>

2: <https://www.w3.org/TR/css-fonts-3/#font-family-prop>

MX-GRID Excel Excel 2 .



eg.

```

14
15
16 /*****
17 * i-AUD 7.3 Initialize
18 * 예) 전역변수 설정으로 사용.
19 *****/
20 var CustomInitialize = function() {
21     /*
22     웹폰트 적용 샘플
23     AUD.GlobalConfig.WebFont.Add('나눔고딕', 'NanumGothic', 'nanum-gothic-v17-latin_korean-regular.woff');
24     */
25     AUD.GlobalConfig.WebFont.Add('나눔스퀘어EB', '나눔스퀘어OTF ExtraBold', 'NanumSquareEB.otf');
26     AUD.GlobalConfig.WebFont.Add('나눔스퀘어B', '나눔스퀘어 Bold', 'NanumSquareB.ttf');
27
28

```

eg. MX-Grid Excel MX-Grid

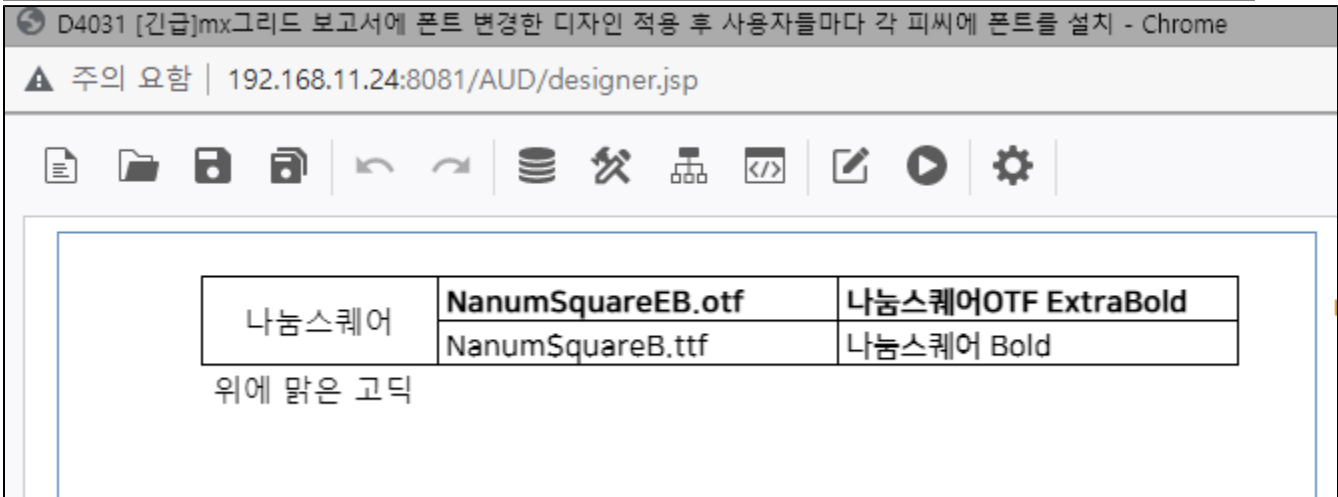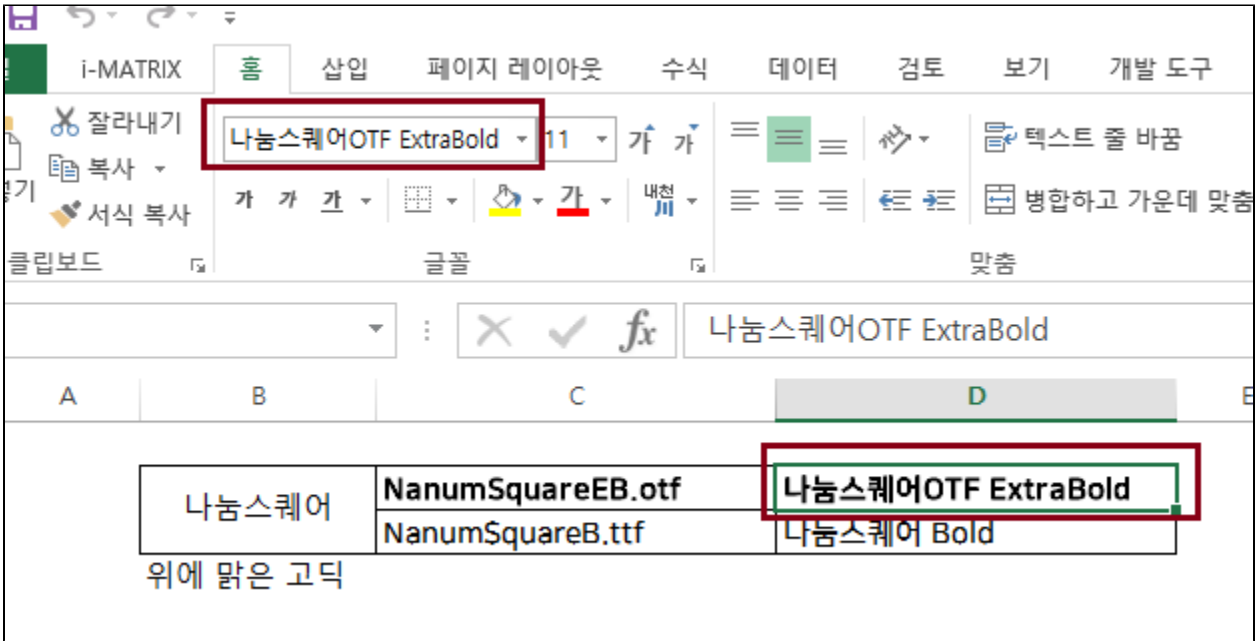

eg. Label

