
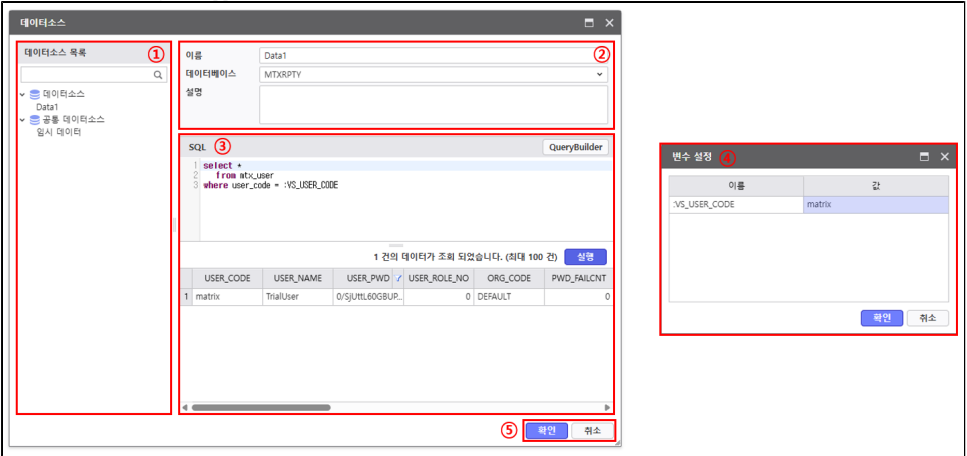
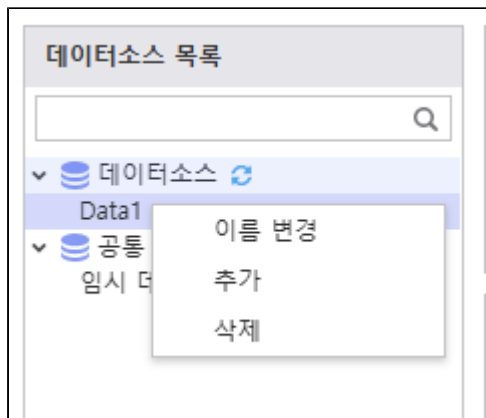







 7.0.610.20260903-11 .
7.0.610.20260903-11 "[I-AUD]" .

1.
 - a. **i-AUD** .
 - b. i-AUD Designer [] .



2. a. i-AUD Designer > > > [SQL]
b. . .
c. . . , SQL .
d. , .

- | | | |
|----|----|---|
| 3. | a. |  |
| | |  |
| | |  |
| | |  |
| | |  |
| | |  |
| | |  |
| | |  |
| | |  |

- a.

- SQL

데이터베이스 목록

- ▼ 데이터베이스
 - user-mail
 - ▼ 공통 데이터베이스
 - 임시 데이터

이름

데이터베이스

설명

AUD-CONFLUX

SQL

```

1

```

최대 100 건까지 조회 가능합니다.

실행

확인

취소

- The image displays two screenshots of the '데이터베이스 - DataGrid' application interface, showing the process of creating a temporary table.

Top Screenshot:

 - Database Selection:** The left sidebar shows the '데이터베이스 목록' (Database List) with 'user-mail' selected under the '공통 데이터베이스' (Common Database) category.
 - Table Selection:** The '데이터베이스' (Database) field is set to 'user-mail' and the '데이터베이스' (Database) dropdown is set to 'MTXRPITY'.
 - SQL Query:** The SQL editor contains a query to select user information:


```

1 SELECT "T1"."user_code" AS "05090090" -- User Code
2 , "T1"."user_name" AS "03092000" -- User Name
3 , "T2"."mail_addr" AS "0AEB13747" -- Mail Address
4 , "T2"."sms_no" AS "087A84909" -- Mobile Number for SMS
5
6 FROM   "public"."mtx_user" "T1" -- User Management
7       INNER JOIN "public"."mtx_user_mail" "T2" -- User Mail Information Management
8       ON ("T1"."user_code" = "T2"."user_code")
      
```
 - Status Bar:** The bottom right shows '최대 100 건까지 조회 가능합니다.' (You can search up to 100 records) and buttons for '확언' (Confirm) and '취소' (Cancel).

Bottom Screenshot:

 - Database Selection:** The left sidebar shows the '데이터베이스 목록' (Database List) with '임시 데이터' (Temporary Data) selected under the '공통 데이터베이스' (Common Database) category.
 - Table Selection:** The '데이터베이스' (Database) field is set to '임시 데이터' and the '데이터베이스' (Database) dropdown is set to 'MTXRPITY'.
 - SQL Query:** The SQL editor contains a query to select user information from the temporary table:


```

1 select USER_CODE as "CODE",
2       USER_NAME as "NAME",
3       from mt_x_user
4 where user_code = 0-VS_USER_CODE
      
```
 - Status Bar:** The bottom right shows '최대 100 건까지 조회 가능합니다.' (You can search up to 100 records) and buttons for '확언' (Confirm) and '취소' (Cancel).

데이터베이스 목록

데이터베이스

user-mail

공통 데이터소스

임시 데이터

이름

데이터베이스

설명

임시 데이터

MTXRPITY

임시 데이터 입니다.

SQL

```

1 select USER_CODE as "CODE",
2       USER_NAME as "NAME"
3 from MTX_USER
4 where user_code = 0-VS_USER_CODE

```

최대 100 건까지 조회 가능합니다.

실행

확인

취소

✓

- i-AUD Designer [] . 'D(• Development)' . [i-AUD] . .

		7.0.600.20260903-11, 7.0.610.20260903-11
---	--	---

	☐ API Open	☒ UI Open	☐ Read Only	☐ Not Use	☐ Hidden	☐ Not Recommend	☐
	- i-AUD : 7.0.600.0-202608271001 - Release No : 7.0.610.20260903-11						

i

- URL :
-
