

1.
- a. i-META Viewer [] MultiComboBox . (UseAllItems) [] .


b.

	() MultiComboBox
	opIn () () — .
	Between from to
	· (Input) · PickList
2.
- a. : AUD Designer > i-META Viewer >

b. AUD Designer i-META Viewer .

c. [] [] .

d. . (UseAllItems = false)

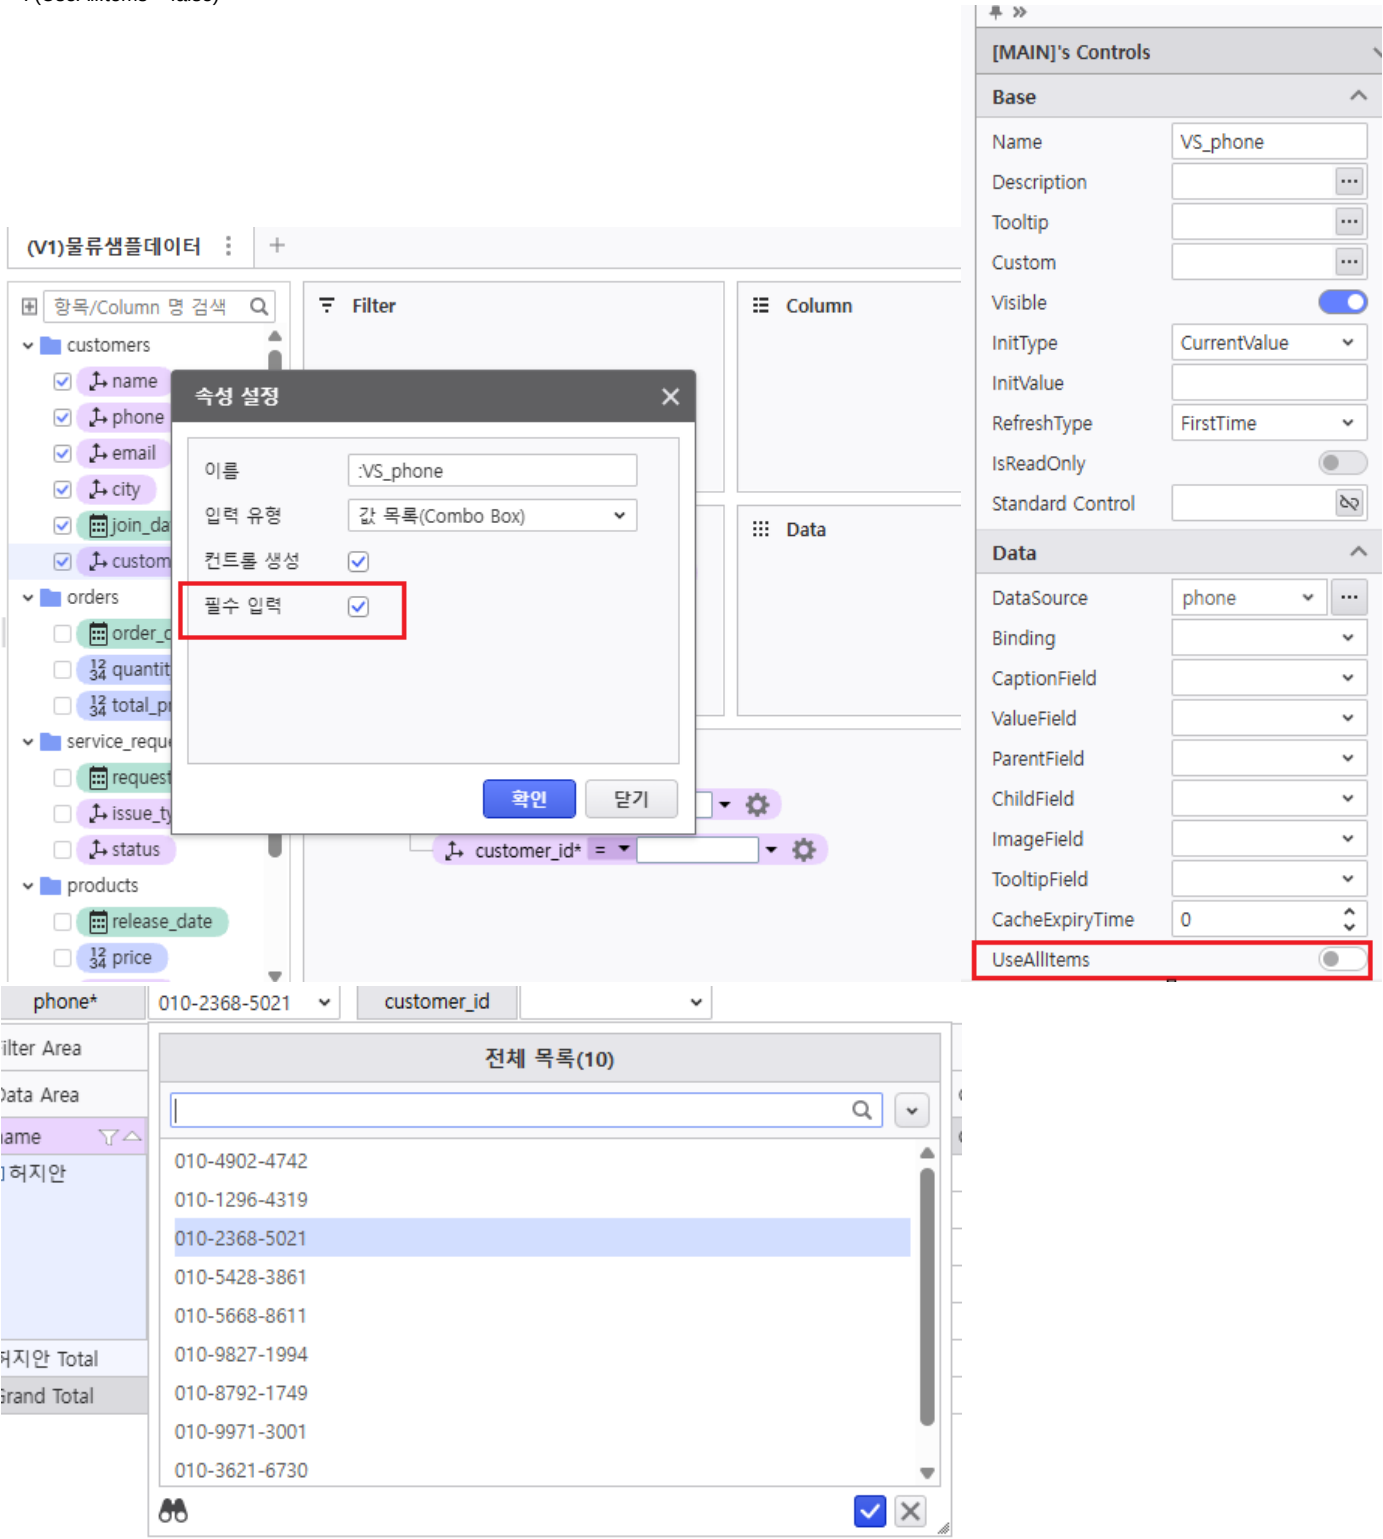

e. . (UseAllItems = true)

The screenshot illustrates the configuration of a data control in the DevExpress WinForms IDE. The main window shows a data grid with columns for customers, orders, and products. A context menu is open over the grid, with the '전제' (Precondition) option highlighted. The '속성 설정' (Property Setting) dialog is displayed, showing the configuration for the 'VS_customer_id' property. The '필수 입력' (Required Input) checkbox is checked. The '[MAIN]'s Controls panel on the right shows the 'Base' and 'Data' sections, with the 'UseAllItems' checkbox checked.

- `MultiComboBox UseAllItems`
- `UseAllItems Designer`



- (iMgt) **UseAllItemsSetting** .

	☐ API Open	☒ UI Open	☐ Read Only	☐ Not Use	☐ Hidden	☐ Not Recommend	☐
	7.0.600.20260903-11						

- URL :

